


- Fully Rated for Fluorescent Loads
- 100W SBL LED Load

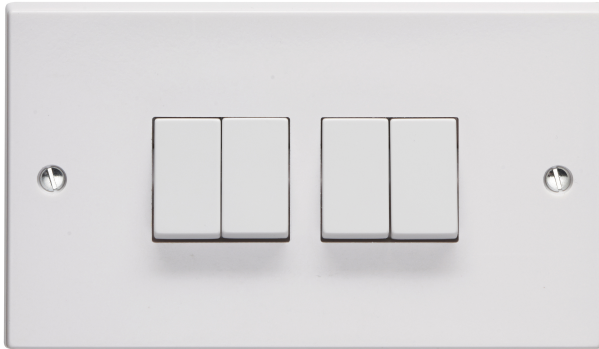

Product Specification Data

Revision Date: 11/10/2024

Product Standard/s	BS EN 60669-1
Terminal Capacity L&N	4 x 1.0, 3 x 1.5, 1 x 2.5 mm <sup>2</sup>
Frequency	50 Hz
LRV Value	73
CE Conformity	Yes
WEEE Symbol	Yes
UKCA Conformity	Yes
Wiring system	Other
Method of operation	Rocker/button
Assembly arrangement	Basic element
Number of modules (module system)	0
Push button switch	Yes
Number of rockers	4
Mounting method	Flush-mounted
Type of fastening	Screw mounting
With mounting plate	Yes
Material	Plastic
Material quality	Other
Halogen free	Yes
Surface protection	Other
Surface finishing	Glossy
Colour	White
Illumination	No
Function lighting	Other
Type of lighting	LED exchangeable
Suitable for degree of protection (IP)	IP2X
Nominal voltage	250 V
Rated current	10 A
Switching current for fluorescent lamps	10 AX

Connection type	Screwed terminal
Device width	86 mm
Device height	86 mm
Min. depth of built-in installation box	16 mm



Venus Electric  
Address: Salah Al-Din Al Ayoubi St, Jabal Alhussein,  
Amman  
Phone: +962 79196 6817  
Fax: 064640203  
Email: [info@venuselect.com](mailto:info@venuselect.com)  
Website: [www.venuselect.com](http://www.venuselect.com)